



PATCO® 152
General Purpose Vinyl Tape
Lead -Free, Color Coding


APPLICATIONS

- Color coding.
- Identifying safety equipment.
- Aisle and hazard marking.
- Duct and joint sealing.
- Harness wrapping.
- Decorative packaging.
- Striping.

FEATURES & BENEFITS

- Highly conformable.
- Controlled unwind.
- Excellent solvent, chemical, moisture and abrasion resistance.
- Adheres snugly to smooth and irregular surfaces.
- Applies quickly and easily.
- Excellent for spiral wrapping.
- Meets Federal Specification PPP-T-66E .

CONSTRUCTION

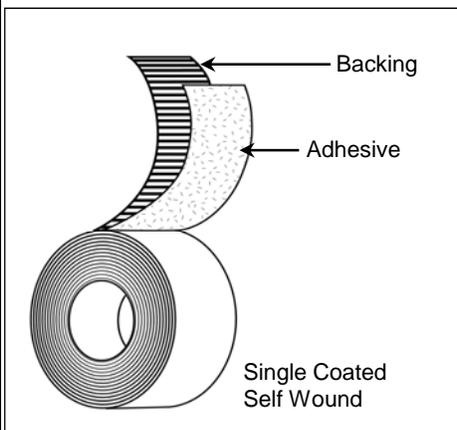

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyvinyl Chloride

Adhesive:

- Rubber

Colors:

- Black, Brown, Purple, Red, Orange, White, Yellow, Blue, Green

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	6 mils	0.152 mm	PSTC-133
Substrate Thickness	5 mils	0.127 mm	PSTC-133
Adhesion to Steel	19 oz./in.	0.208 N/mm	ASTM D-3330
Tensile Strength	16 lb./in.	2.802 N/mm	ASTM D-3759
Elongation (%)	225 %		
Application Temperature Range	40°F to 120°F	4°C to 49°C	
Operating Temperature Range	-14°F to 140°F	-10°C to 60°C	

**Recommended storage conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.