


High Temperature PET Splicing Tape

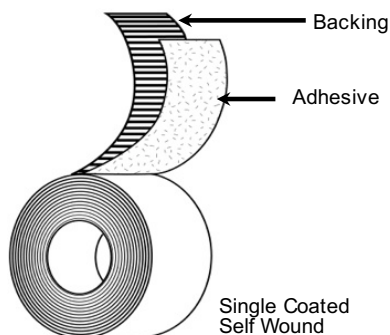

Backing:	Metallized PET Film
Adhesive:	Silicone (S610)
Liner:	N/A
Colors:	Silver
Specifications:	N/A
Size Options:	Incremental widths 1/4" - 41" x 108ft

Applications

- Autoclaving applications
- Splicing of photographic films, low surface energy films, and paper

Features

- Metallized PET Film Backing
- Silicone Adhesive
- Clean-cut plastic core

Benefits

- Thin, low profile backing
- Good puncture and tear resistance
- Rigid and strong
- High visibility metallic finish
- Detectable by reflective splice sensors
- Bonds aggressively
- Allows initial repositioning
- Clean removal - resists staining and ghosting
- Recyclable and reduces contamination potential

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	3.5	mils	0.089	mm	PSTC-133
Substrate Thickness	2.0	mils	0.051	mm	PSTC-133
Adhesion to Steel	30	oz/in	3.28	N/cm	ASTM D-3330
Tensile Strength	45	lb/in	78.81	N/cm	ASTM D-3759
Elongation	150%				
Application Temperature	40 to 120 °F		-4 to 49 °C		
Operating Temperature	-40 to 300 °F		-40 to 149 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.