




225FR

Flame Retardant Duct Tape

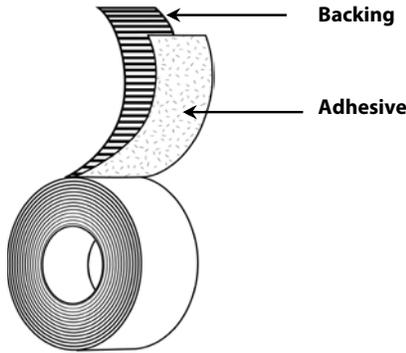

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** White Printed, Silver (not printed)
- Specifications:** Meets FAR 25.853(a) & DMS 1968E Listed Fk05-006 and Fk05-113.
- Standard Sizes:** 48mm x 55m, 72mm x 55m

Applications

- Cargo pit applications for freight carrying aircraft
- Challenging applications where high adhesion and flame resistance is critical
- Seaming and repairing cargo compartment liners
- Covering pins & rivets
- General purpose patching, sealing & bundling

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Complies with FAR 25.853(a)

Benefits

- High tensile strength for difficult applications
- Extremely conformable
- Crisp, straight tear
- Moisture, solvent & abrasion resistant
- Aggressive adhesion to all surfaces
- Resists flagging and lifting
- Meets requirements for use in aircraft cargo compartments

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	12 mils	304.8 mic	ASTM D-1000
Adhesion to Steel	40 oz/in	4.38 N/cm	PSTC-101
Tensile Strength	29 lb/in	50.79 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Exiting Time	3 sec		FAR 25.853(a)
Burn Length	5.5"		FAR 25.853(a)
Drip Exiting	N/a		FAR 25.853(a)

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryplastics.com

Nijverheidsstraat 10
 2260 Oevel (Westerlo) Belgium
 32-014-722500 Fax 32-014-722570
 6/6/12