


POLYKEN®



236

Premium Grade Duct Tape - Printed

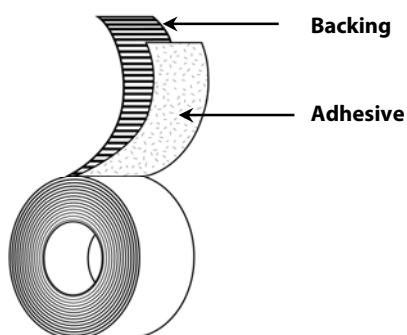

Backing:	PE Coated Cloth
Adhesive:	Rubber
Liner:	N/A
Colors:	Printed Silver, Printed Black "Polyken 236, Max Temp 200°F"
Specifications:	Tested in accordance with UL 723
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Heavy Duty duct & insulation sealing
- General purpose packaging and repair
- Covering thermal insulation materials
- Temporary holding and bundling

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Low VOC Content

Benefits

- Excellent tensile strength
- Clean, crisp tear
- Conformable and moisture resistant
- Superior adhesion
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	12 mils	304.8 mic	ASTM D-1000
Adhesion to Steel	36 oz/in	3.94 N/cm	PSTC-101
Tensile Strength	28 lb/in	49.04 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.