




500

Low-Gloss Duct Tape

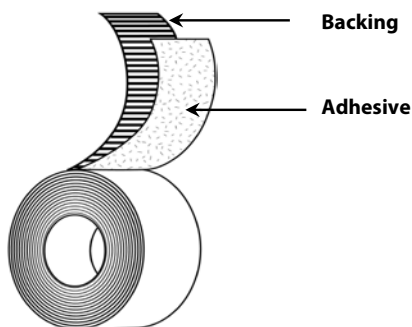

Backing: Matte-Finish PE-Coated Cloth

Adhesive: Rubber

Liner: N/A

Colors: Black

Specifications: Tested in accordance with UL 723

Standard Sizes: 48mm x 45Yd, 72mm x 45Yd

Applications

- "AV Cord Tape" - Protect and anchor wiring for photography, film, live entertainment, meetings, and conventions
- Bookbinding & seam reinforcement
- Wrapping or bundling wire, metals and plastics
- Color Coding
- General repair

Features

- Low-Gloss PE Coated Cloth
- Natural rubber based adhesive
- Low VOC Content

Benefits

- Matte-finish for less reflectivity and low sheen
- Strong and abrasion resistant
- Moisture & solvent resistant
- High tack for a variety of surfaces
- Clean removal - no residue
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	11 mils	279.4 mic	ASTM D-1000
Adhesion to Steel	70 oz/in	7.66 N/cm	PSTC-101
Adhesion to Backing	45 oz/in	4.93 N/cm	PSTC-101
Tensile Strength	50 lb/in	87.56 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F		
VOC Content	<1 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

Standard Shelf Life (at 25C): 12 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
1-800-343-7875 Fax 1-800-328-4822
www.berryplastics.com

Nijverheidsstraat 10
2260 Oevel (Westerlo) Belgium
32-014-722500 Fax 32-014-722570
1/2/13