


Premium High Temperature Splicing Tape

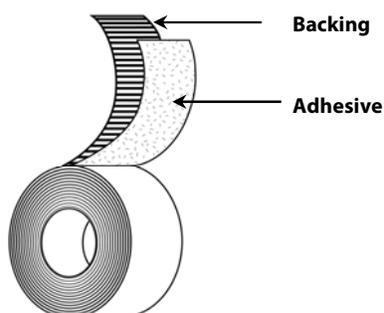

Backing:	Polyester Film
Adhesive:	Silicone
Liner:	N/A
Colors:	Blue
Specifications:	N/A
Standard Sizes:	2" x 72Yd, 3" x 72Yd

Applications

- Splicing low-surface energy materials
- Splicing coated or uncoated papers or corrugate
- Foil splicing
- Tape splicing/manufacturing

Features

- Polyester Film Backing
- Silicone Adhesive
- Self Wound Construction

Benefits

- Thin, low-profile film
- Excellent tensile strength and durability
- Blue for high visibility
- Outstanding adhesion to low-energy substrates
- Excellent shear strength for improved splice bond
- Performs well in extremely high temperatures
- No release liner for ease of use and less waste

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	2.8 mils	71.12 mic	ASTM D-1000
Adhesion to Steel	35 oz/in	3.83 N/cm	PSTC-101
Adhesion to Backing	25 oz/in	2.74 N/cm	PSTC-101
Tensile Strength	25 lb/in	43.78 N/cm	ASTM D-1000
Max Performance Temp	316 °F	158 °C	
Elongation	125%		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.