

No Skidding®



NS4500 SERIES

Slip Resistant Resilient Safety Tape


266 Wildcat Rd, Toronto, ON M3J 2N5 Canada
Phone: (416) 667-1788 Fax: (416) 667-1783
sales@noskidding.com www.noskidding.com
or call us Toll Free at 1-800-375-0571

We warehouse within the U.S. for our U.S. customers

NS4500 Series

Slip Resistant Resilient Safety Tape

NS4500 Series unique co-polymer construction provides heavy duty slip resistance on par with most highly abrasive products, yet is soft to the touch. Because it is made of a rubberized material, it is comfortable for bare foot traffic, yet tough enough to withstand heavy boot, shoe, or cart traffic. Engineered as a premier performer, NS4500 resilient is a perfect solution for helping to prevent slips and falls on most industrial and commercial applications. NS4500 series is very conformable.

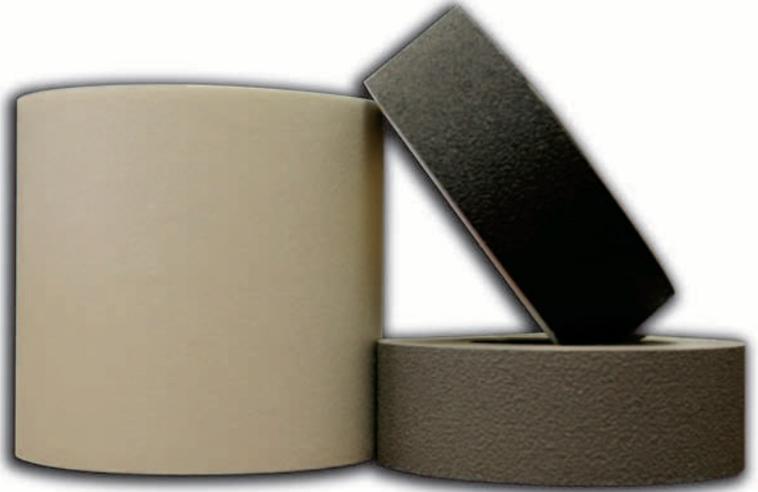

Feature	Benefits
Quality Raw Materials	Long life and durable.
Textured Resilient Surface	Soft texture, slip resistant, comfortable to bare feet.
Easy Installation	Simply position, peel-off the backing, and apply to a clean, dry, oil free surface.
Low Profile	Prevents edge curl.




NS4500 Series
Slip Resistant
Resilient Safety Tape

Kinetic Coefficient of Friction

Non-Skid Material	Leather	Wet Rubber	Wet Leather	Rubber
NS4510B Resilient-Black	0.58	1.18	0.84	1.06
NS4520G Resilient-Gray	0.58	1.18	0.84	1.06
NS4550C Resilient-Clear	0.58	1.18	0.84	1.06

Testing Method: ASTM D1894-95 Kinetic Coefficient of Friction Testing 7/97



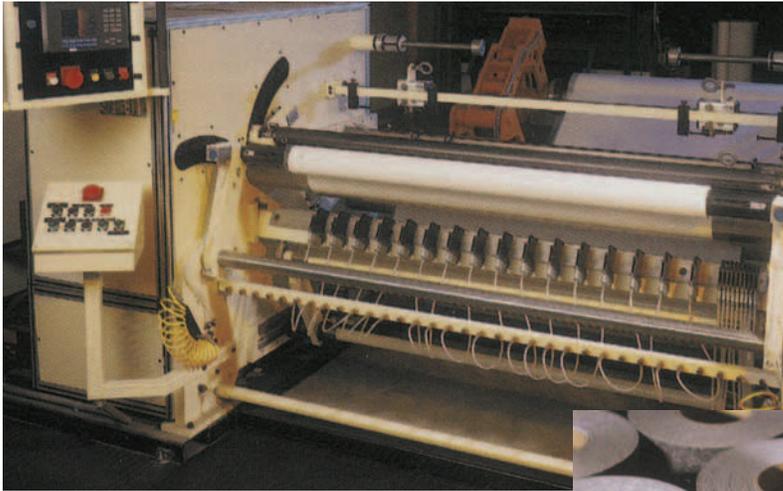

Manufacturing Process for Safety Tapes


NS4500 Resilient Series Standard Roll Size & Packing

- 1"x60' Roll (12 rolls/case)
- 2"x60' Roll (6 rolls/case)
- 3"x60' Roll (4 rolls/case)
- 4"x60' Roll (3 rolls/case)
- 6"x60' Roll (2 rolls/case)
- 12"x60' Roll (1 rolls/case)
- 18"x60' Roll (1 rolls/case)
- 24"x60' Roll (1 rolls/case)
- 36"x60' Roll (1 rolls/case)
- 48"x60' Roll (1 rolls/case)
- 6"x24" (50 pcs/case)
- 6"x24" (10 pcs/case)

TECHNICAL DATA

Surface Compatibility:	Painted wood, painted metal, sealed concrete
Application Temperature:	Apply when above 50° F
Storage Life:	1 Year @ 72° F/50% relative humidity
Standard Sizes:	Roll Lengths: 60'
	Roll Widths: 1", 2", 3", 4", 6", 12", 18", 24", 36", 48"
	Die Cut: 6" x 24" Custom die cuts and other sizes available on request
Available Colors:	Black, Gray & Clear

Custom colors available upon request

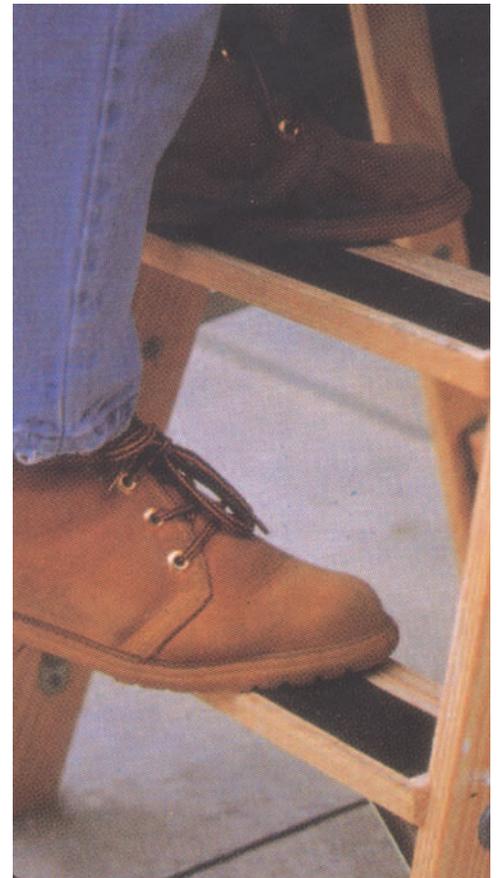

Limitations of Liability: N S P's liability on any claim of any kind, including claims based upon N S P's negligence or strict liability, for any loss or damage arising out of, connected with, or resulting from the use of the products, shall in no case exceed the purchase price allocable to the products or part thereof which give rise to the claim. In no event shall N S P be liable for consequential or incidental damages.

*All information and testing is based on our best experience and knowledge and does not constitute a warranty of products sold. All materials are sold with the understanding that the user will independently determine suitability of the end use. We recommend customers test bondability immediately upon lamination or after aging either accelerated or after a period of time.

No Skidding® products are in use around the world in hotels, warehouses, factories, shopping malls, public transit systems, airports, hospitals and senior care, office complexes, restaurants, day care, schools, fitness clubs, government and military facilities.

The most complete range of slip injury prevention products in the World.

No Skidding® 
www.noskidding.com

266 Wildcat Rd, Toronto, ON M3J 2N5 Canada
 Phone: (416) 667-1788 Fax: (416) 667-1783
 sales@noskidding.com www.noskidding.com
 or call us Toll Free at 1-800-375-0571

We warehouse within the U.S. for our U.S. customers

* No Skidding® is a registered trademark of No Skidding Products, Inc., Toronto Canada

E.&O.E.