



PATCO® 110-53
Heavy-Duty Vinyl Tape


APPLICATIONS

- Provides maximum masking protection during mediablast or shot peening applications.
- Performs well as an easy-to-use pressure-sensitive gasketing material.
- Abrasion protection.

FEATURES & BENEFITS

- Conformable to irregular surfaces
- Extremely durable
- Aggressive long-term bond
- Die-cuttable
- Easy to apply

CONSTRUCTION

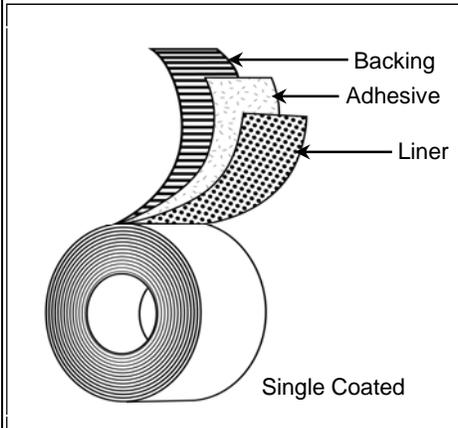

PRODUCT DESCRIPTION

Single-Coated w/Liner Construction

Backing:

- Polyvinyl Chloride

Adhesive:

- Acrylic

Liner:

- 53# Coated Kraft Paper

Colors:

- Black

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	10 mils	0.254 mm	PSTC-133
Substrate Thickness	8.5 mils	0.216 mm	PSTC-133
Adhesion to Steel	55 oz./in.	0.602 N/mm	ASTM D-3330
Tensile Strength	25 lb./in.	4.378 N/mm	ASTM D-3759
Elongation (%)	200 %		
Application Temperature Range	50°F to 120°F	10°C to 49°C	
Operating Temperature Range	-40°F to 200°F	-40°C to 93°C	

**Recommended storage conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.