



PATCO® 542
Economy Grade Preservation
& Sealing Tape


APPLICATIONS

- Patching and sealing shrink wrap to boat hulls
- Splicing, seaming, and sealing polyethylene films

FEATURES & BENEFITS

- Available in a wide range of widths.
- Solvent and moisture resistant.
- Conformable.
- Tough & abrasion resistant.
- Clean Removal
- Controlled Unwind.

CONSTRUCTION

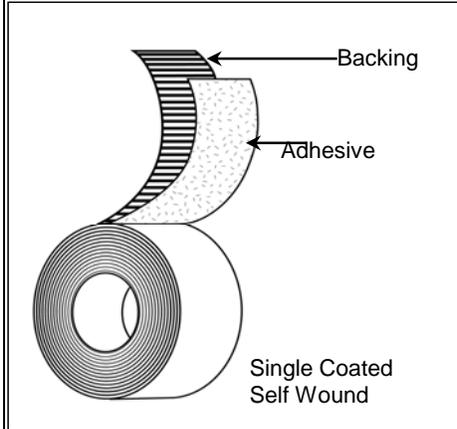

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Medium Density Polyethylene

Adhesive:

- Rubber

Colors:

- White

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	6.4 mils	0.155 mm	PSTC-133
Substrate Thickness	5.0 mils	0.127 mm	PSTC-133
Adhesion to Steel	40 oz./in.	0.438 N/mm	ASTM D-3330
Tensile Strength	9 lb./in.	1.573 N/mm	ASTM D-3759
Elongation (%)	350 %		
Application Temperature Range	40°F to 120°F	4°C to 49°C	
Operating Temperature Range	-40°F to 200°F	-40°C to 93°C	

**Recommended storage conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.