



PATCO® 8125
Automotive Surface Protection Tape


APPLICATIONS

- Heavy-duty surface protection.
- Anti-squeak, vibration and sound dampening for automotive and marine OEM.
- Short-term exterior protective applications.

FEATURES & BENEFITS

- Tough and durable.
- Abrasion resistant.
- High adhesive strength.
- Long aging - will not degrade.
- Easy of application.
- Stays flat - dimensionally stable.
- Effectively seals to irregular surfaces.
- Cut to size - remove liner and apply.
- Excellent for die-cutting.
- Solvent resistant.

CONSTRUCTION

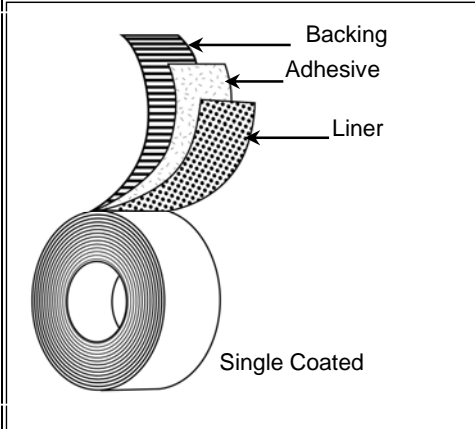

PRODUCT DESCRIPTION

Single-Coated w/Liner Construction

Backing:

- Interior-Grade Aromatic Polyurethane

Adhesive:

- Acrylic

Liner:

- 53# or 92# Coated Kraft Paper

Colors:

- Transparent

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	9.5 mils	0.241 mm	PSTC-133
Substrate Thickness	7 mils	0.178 mm	PSTC-133
Adhesion to Steel	110 oz./in.	1.204 N/mm	ASTM D-3330
Tensile Strength	55 lb./in.	9.632 N/mm	ASTM D-3759
Elongation (%)	600 %		
Operating Temperature	-40°F to 250°F	-40°C to 121°C	
Application Temperature	50°F to 120°F	10°C to 49°C	

****Recommended storage conditions: 40-60% Humidity, 60 °F - 80 °F**

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.