



PATCO® 6033
High Temperature PET Masking
& Splicing Tape


APPLICATIONS

- Flashbreaker for composites, photographic film splice, some silicone release coated film, and paper splicing.
- Autoclaving applications.

FEATURES & BENEFITS

- Thin, rigid film
- Bonds aggressively, but is repositionable.
- Good puncture and tear resistance.
- Withstands high temperatures up to 300F.
- Clean removal.

CONSTRUCTION

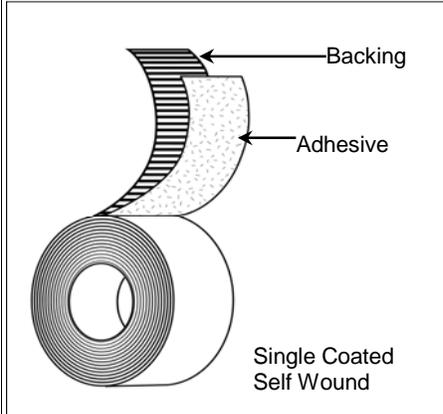

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyester Film

Adhesive:

- Silicone

Colors:

- Clear

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	3.5 mils	0.089 mm	PSTC-133
Substrate Thickness	2.0 mils	0.051 mm	PSTC-133
Adhesion to Steel	28 oz./in.	0.306 N/mm	ASTM D-3330
Tensile Strength	46 lb./in.	7.881 N/mm	ASTM D-3759
Elongation (%)	120 %		
Operating Temperature	-40°F to 300°F	-40°C to 149°C	
Application Temperature	40°F to 120°F	-4°C to 49°C	

**Recommended storage conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.