


## Heavy-Duty Heat Shrink PE Film Tape

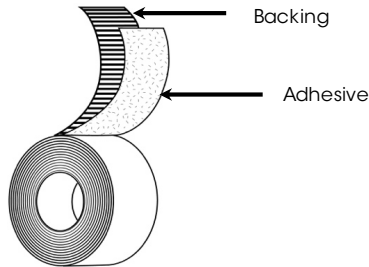

<b>Backing:</b>	Polyethylene Film
<b>Adhesive:</b>	Synthetic Rubber
<b>Liner:</b>	N/A
<b>Colors:</b>	White, Clear, Blue
<b>Specifications:</b>	N/A
<b>Standard Sizes:</b>	48mm x 55m, 96mm x 55m

### Applications

- Boat wrap industry and other equipment storage and protection uses requiring shrink wrap and heat shrink tape
- Short-term masking for stucco and plaster
- Heavy-duty polyethylene splicing and hanging
- Surface protection
- Dissimilar metal tape
- Labeling and color coding

### Features

### Benefits

- |                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Polyethylene Film Backing</li> <li>• Synthetic Rubber Adhesive</li> </ul>       | <ul style="list-style-type: none"> <li>• Conformable and flexible</li> <li>• Excellent durability and solvent resistance</li> <li>• Low elongation for constant surface bond</li> <li>• Pinked/Serrated edge available for hand tearability</li> <li>• High tack for good quick stick</li> <li>• Excellent shear strength</li> <li>• Repositionable and clean removal from many surfaces</li> </ul> |
| <ul style="list-style-type: none"> <li>• Low VOC, <u>Contains no heavy metals</u> (such as lead and chromium)</li> </ul> | <ul style="list-style-type: none"> <li>• Environmentally friendly and safe to use</li> </ul>                                                                                                                                                                                                                                                                                                        |

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness (Colors)</b>	9.0 mils	0.229 mm	ASTM D-1000
<b>Adhesion to Steel</b>	85 oz/in	9.30 N/cm	PSTC-101
<b>Adhesion to Backing</b>	40 oz/in	4.38 N/cm	PSTC-101
<b>Tensile Strength</b>	30 lb/in	52.54 N/cm	ASTM D-1000
<b>Permeance</b>	0.10 US Perms		ASTM F1249
<b>Application Temperature</b>	30 to 160 °F	-1 to 71 °C	
<b>Operating Temperature</b>	20 to 200 °F	-7 to 93 °C	
<b>Elongation</b>	65%		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.