




Premium Grade Duct Tape

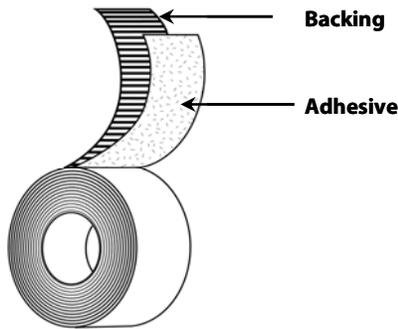

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Silver, Black, Red, White, OD
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 55m, 72mm x 55m

Applications

- Waterproof repairs
- Heavy-duty packaging & bundling
- Heavy-duty contractor and manufacturing uses
- Media-blast protection
- Seaming & sealing for heavy PE sheeting and tarps

Features

- PE-Coated Cloth Backing
- Natural rubber based adhesive
- Low VOC Content

Benefits

- High tensile strength for difficult applications
- Puncture & abrasion resistance
- Crisp, straight tear
- Moisture, solvent & abrasion resistant
- Aggressive adhesion to all surfaces
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	13 mils	330.2 mic	ASTM D-1000
Adhesion to Steel	55 oz/in	6.02N/cm	PSTC-101
Tensile Strength	45 lb/in	78.81 N/cm	ASTM D-1000
Operating Temperature	40-200°F	4-93°C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.