




Stucco Masking Tape

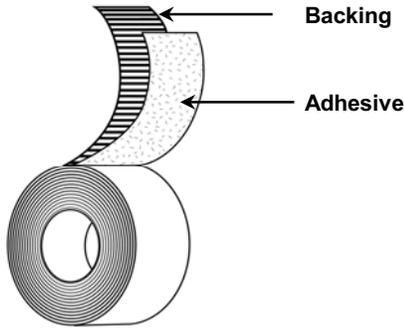

Backing: PE Coated Cloth

Adhesive: Rubber

Liner: N/A

Colors: Red

Specifications: Tested in accordance with UL 723

Standard Sizes: 48mm x 55m

Applications

- Outdoor masking on wood, metal and concrete.
- Home and general repair
- Hanging PE sheeting for outdoor stucco installation
- Bundling, patching, and mending

Features

- PE-Coated Cloth Backing
- Natural rubber based adhesive
- Low VOC Content

Benefits

- Excellent balance of tensile strength and tearability
- Aggressive adhesion to rough surfaces
- Superior holding power for hanging applications
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	10 mils	254 mic	ASTM D-1000
Adhesion to Steel	50 oz/in	5.47 N/cm	PSTC-101
Tensile Strength	22 lb/in	38.53 N/cm	ASTM D-1000
Tack (Rolling Ball)	2.5"		
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25°C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.