



PATCO® 179
High Temperature Finline
Masking Tape


APPLICATIONS

- Masking color separations on plastic (TPO & RIM) fascia, trim, and finished metals.
- High temperature masking.
- OEM paintline and powerwash mask.
- Autobody aftermarket fineline color separation.
- Short-term outdoor masking (72 hrs).
- Dust-free for clean room paint operations.

FEATURES & BENEFITS

- Conformable and solvent resistant.
- Non-glare matte finish.
- Finline edge.
- High temperature resistance.
- Stain and ghosting resistant.
- Clean cutting plastic core, recyclable.
- Excellent surface wetability.
- Handles tight radius and compound curves.
- Clean removability after bake cycle.
- Splinter and fiber free - less waste.
- Available with release liner.

CONSTRUCTION

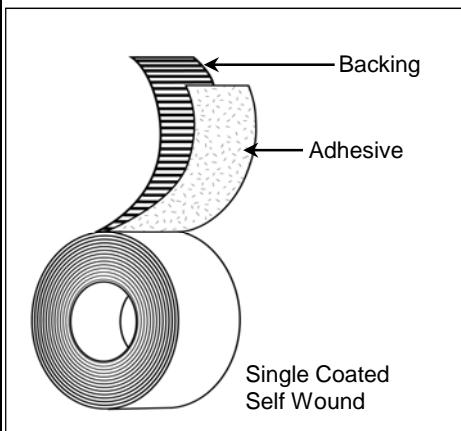

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyvinyl Chloride

Adhesive:

- Rubber

Colors:

- Medium Blue Matte

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	5.0 mils	0.127 mm	PSTC-133
Substrate Thickness	4.0 mils	0.102 mm	PSTC-133
Adhesion to Steel	13 oz./in.	0.142 N/mm	ASTM D-3330
Tensile Strength	11 lb./in.	1.926 N/mm	ASTM D-3759
Elongation (%)	100 %		
Application Temperature Range	60°F to 100°F	16°C to 38°C	
Operating Temperature Range	40°F to 280°F	4.4°C to 138°C	

****Recommended storage conditions: 40-60% Humidity, 60 °F - 80 °F**

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.